
GSAV



Automatic ON-OFF normally closed class A gas solenoid valve with threaded connections. Quick opening and closing. Aluminium body. Coil with IP65 connector. Suitable for manufactured gas, natural gas, liquefied petroleum gas (LPG), non-aggressive gas and air.
Operating temperature range: -20 to 60°C.

Type	Part number	Connections	Description	Q.ty/ Box	Box/ Carton	€/unit
GSAV15/02B	021.0020.001	1/2"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1	
GSAV20/02B	021.0021.001	3/4"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1	
GSAV25/02B	021.0022.001	1"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1	

Dimensions on page 340

GSAV-R



Automatic ON-OFF normally closed class A gas solenoid valve with threaded connections. Quick opening and closing with adjustable flow rate. Aluminium body. Coil with IP65 connector (1/2"-3/4"-1"). Coil with IP54 electrical enclosure (1/4"1/2"-2"). Suitable for manufactured gas, natural gas, liquefied petroleum gas (LPG), non-aggressive gas and air.
Operating temperature range: -20 to 60°C.

Type	Part number	Connections	Description	Q.ty/ Box	Box/ Carton
GSAV15R	021.0010.001	1/2"	Power supply 230 VAC. Max. pressure 0.5 bar	1	1
GSAV20R	021.0011.001	3/4"	Power supply 230 VAC. Max. pressure 0.5 bar	1	1
GSAV25R	021.0012.001	1"	Power supply 230 VAC. Max. pressure 0.5 bar	1	1
GSAV32R	021.0013.101	1.1/4"	Power supply 230 VAC. Max. pressure 0.5 bar	1	1
GSAV40R	021.0014.101	1.1/2"	Power supply 230 VAC. Max. pressure 0.5 bar	1	1
GSAV50R	021.0015.101	2"	Power supply 230 VAC. Max. pressure 0.5 bar	1	1

Dimensions on page 340

GSAV-2R






Automatic ON-OFF normally closed class A gas solenoid valve. Quick opening and closing with adjustable flow rate. Aluminium body. Coil with IP54 connector. Suitable for manufactured gas, natural gas, liquefied petroleum gas (LPG), non-aggressive gas and air.
Operating temperature range: -20 to 60°C.

Type	Part number	Connections	Description	Q.ty/ Box	Box/ Carton
GSAV202R	021.0121.001	3/4"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV252R	021.0122.001	1"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV322R	021.0123.001	1.1/4"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV402R	021.0124.001	1.1/2"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV502R	021.0125.001	2"	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV652R	021.0126.001	DN65	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV802R	021.0127.001	DN80	Power supply 230 VAC. Max. pressure 0.2 bar	1	1
GSAV1002R	021.0128.001	DN100	Power supply 230 VAC. Max. pressure 0.2 bar	1	1

Dimensions on page 340


OVERALL DIMENSIONS

GSAV..R




Modello	GSAV15R	GSAV20R	GSAV25R	GSAV32R	GSAV40R	GSAV50R
Attacchi	Rp 1/2”	Rp 3/4”	Rp 1”	Rp 1.1/4”	Rp 1.1/2”	Rp 2”
A	76	96	96	154	154	173
B	15	25	25	31	31	39
C	101	137	137	193	193	194
D	52	70	70	105	105	127


GSAV



Modello	Attacchi	A	B	C	D
GSAV15/02B	Rp 1/2”	76	15	107	52
GSAV20/02B	Rp 3/4”	96	25	137	70
GSAV25/02B	Rp 1”	96	25	137	70

GSAV/2R..2L

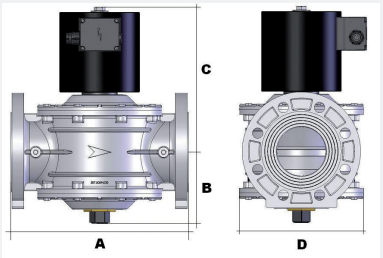



Modello	Attacchi	A	B	C	D
GSAV202R	Rp 3/4”	96	25	155	70
GSAV202L	Rp 3/4”	96	25	229	70
GSAV252R	Rp 1”	96	25	155	70
GSAV252L	Rp 1”	96	25	229	70
GSAV322R	Rp 1”1/4	154	31	193	105
GSAV322L	Rp 1”1/4	154	31	271	105
GSAV402R	Rp 1”1/2	154	31	193	105
GSAV402L	Rp 1”1/2	154	31	271	105
GSAV502R	Rp 2”	173	39	194	127
GSAV502L	Rp 2”	173	39	283	127
GSAV652R	DN65 - PN16	300	120	245	210
GSAV802R	DN80 - PN16	300	120	245	210
GSAV1002R	DN100 - PN16	360	135	280	220